

11/01/99

jc713 U.S. PRO

Please type a plus sign (+) inside this box → ☒PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. **TRD 021 PA**
First Inventor or Application Identifier **Frank A. Scarpino**
Title **DIGITAL FILTER**
Express Mail Label No. **EL411460247US****APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages **50**]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **3**]
(**3 sets--informal**)
4. Oath or Declaration [Total Pages **1**]
(**unsigned**)
a. ☒ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☒ * Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☒ Other: **Check for \$695.00--
filing fee**

NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:**☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____ / _____

Prior application information: Examiner _____

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name **Killworth, Gottman, Hagan & Schaeff, L.L.P.**

Address **One Dayton Centre, Suite 500
One South Main Street**

City **Dayton** State **Ohio** Zip Code **45402-2023**

Country **United States of America** Telephone **(937) 223-2050** Fax **(937) 223-0724**

Name (Print/Type) **Robert L. Showalter** Registration No. (Attorney/Agent) **33,579**

Signature **[Signature]** Date **November 1, 1999**

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Applicant or Patentee: Frank A. Scarpino et al. Att.Dkt.No. TRD 021 PA
Serial or Patent No.: _____
Filed or Issued: _____
For: DIGITAL FILTER

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN

I declare that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act
on behalf of the concern identified below:

NAME OF CONCERN True Dimensional Sound, Inc.
ADDRESS OF CONCERN 1450 Madruga Ave., Suite 404
Coral Gables, FL 33146

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with respect to the invention, entitled DIGITAL FILTER by inventors Frank A. Scarpino and Arturo H. Garcia described in

- ☒ the specification filed herewith
☐ application serial no. _____, filed _____
☐ patent no. _____, issued _____.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). *NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME NONE
ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

NAME _____
ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Stephen N. Knecht

TITLE OF PERSON OTHER THAN OWNER Secretary

ADDRESS OF PERSON SIGNING 1450 Madruga Ave., Suite 404
Coral Gables, FL 33146

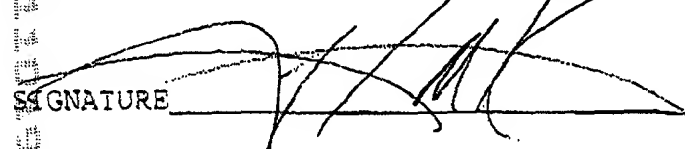SIGNATURE  DATE 11/1/99

Initial Information Data Sheet

Inventor Information

Inventor One Given Name:: Frank A.
Family Name:: Scarpino
Postal Address Line One:: 1984 Indian Head Rd.
City:: Dayton
State or Province:: OH
Postal or Zip Code:: 45459
Citizenship Country:: USA

Inventor Two Given Name:: Arturo H.
Family Name:: Garcia
Postal Address Line One:: 4443 S.W. 11th St.
City:: Miami
State or Province:: FL
Postal or Zip Code:: 33134
Citizenship Country:: USA

Correspondence Information

Name Line One:: Killworth, Gottman, Hagan & Schaeff, L.L.P.
Address Line One:: One Dayton Centre, Suite 500
City:: Dayton
State or Province:: OH
Postal or Zip Code:: 45402-2023
Telephone:: (937) 223-2050
Fax:: (937) 223-0724
Electronic Mail:: igell@kghs.com

Application Information

Title Line One:: **DIGITAL FILTER**
Total Drawing Sheets:: 3
Formal Drawings?: No
Application Type:: Utility
Docket Number:: TRD 021 PA

Representative Information

Registration Number One:: 26,397
Registration Number Two:: 27,262
Registration Number Three:: 29,001
Registration Number Four:: 28,046
Registration Number Five:: 33,579
Registration Number Six:: 39,564
Registration Number Seven:: 38,769

Registration Number Eight:: 44,339
Registration Number Nine:: 40,830
Registration Number Ten:: 33,758
Registration Number Eleven:: 42,695

Continuity Information

This application is a:: Non Prov. of Provisional
> Application One:: 60/148,787
Filing Date: August 13, 1999

JCS25 U.S. PTO
09/431371
11/01/99

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of

Applicant(s): Frank A. Scarpino and Arturo H. Garcia

Title : **DIGITAL FILTER**

Docket : TRD 021 PA

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

EL411460247US

Sir:

"Express Mail" Mailing Label Number EL411460247US

Date of Deposit: November 1, 1999

I hereby certify that this paper or fee is being
deposited with the United States Postal Service

"Express Mail Post Office to Addressee" service under
37 CFR 1.10 on the date indicated above and is
addressed to the Assistant Commissioner for Patents,
Washington, D.C. 20231.

Nancy M. Mastbaum

Nancy M. Mastbaum
Legal Secretary

DIGITAL FILTER

Cross-Reference to Related Application

This application claims the priority of Provisional Application U.S. Serial No. 60/148,787, filed August 13, 1999, and entitled DIGITAL FILTER, which is incorporated herein
5 by reference.

Background of the Invention

This application relates to sound systems for lifelike reproduction of digitally stored sound, e.g., music. It is well known that "live" sound contains recognizable harmonics which are lost during electronic processing and storage. It is also known that "canned" music may be
10 harmonically enhanced during playback by passing the audio output signal through an appropriately designed circuit. Suitable circuits for this purpose are disclosed in U.S. Patent 5,361,306 and in U.S. Ser. No. 08/472,876, filed June 7, 1995, and entitled APPARATUS AND METHOD OF ENHANCING ELECTRONIC AUDIO SIGNALS; U.S. Ser. No. 08/700,728,
15 filed August 13, 1996, and entitled APPARATUS AND METHODS FOR THE HARMONIC ENHANCEMENT OF ELECTRONIC AUDIO SIGNALS; U.S. Ser. No. 08/909,807, filed August 12, 1997, and entitled APPARATUS AND METHODS FOR THE HARMONIC ENHANCEMENT OF ELECTRONIC AUDIO SIGNALS; and U.S. Ser. No. 08/989,373, filed December 12, 1997, and entitled APPARATUS AND METHODS FOR ENHANCING
20 ELECTRONIC AUDIO SIGNALS; each of which is owned by the assignee of the present application and incorporated herein by reference.

Special problems arise when sound is stored on a digital recording medium (e.g., a compact disc). The creation of the digital recording typically involves conversion of the live sound into an audio signal in analog form. The amplitude of the audio signal is then sampled at regularly spaced intervals and digitized for storage. On playback the sound system generates an
25 output signal at the sampling frequency. The sampling frequency conforms to industry standards, most commonly 44,100 Hz. That is only slightly more than twice the highest frequency which

may be heard by the unaided human ear and is therefore near the theoretical lower limit for full bandwidth recording (i.e., the Nyquist critical frequency). Tonal components required for high quality sound reproduction can be easily lost or severely limited by compromises and constraints placed upon the recording process.

- 5 There is a need for a digital device able to provide high quality sound reproduction such as in a personal computer environment.

Summary of the Invention

A digital device is provided for simply and inexpensively enhancing digital sound samples from a compact disk (CD) or other digital information storage medium in such a way that the quality of audible sound produced from the sound samples more closely approaches that of the sound heard live in an acoustically designed environment.

In accordance with a first embodiment of the present invention, a digital filter is provided comprising a series of digitized time coefficients stored in a memory. The time coefficients are mapped to a like number of frequency coefficients. The frequency coefficients are spaced at frequency intervals, have either zero phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency to produce periodicity of a time response for the digital filter.

The time coefficients may be even or odd in number. Preferably, they are odd integers greater than or equal to 5, preferably 7, more preferably 9 and most preferably 11. The time coefficients are defined by inverse discrete Fourier transforms of the frequency coefficients.

In one embodiment of the present invention, a portion of the frequency coefficients having frequencies within a free band are selected so as to achieve a generally constant oscillation frequency across a center band which is broader than the free band.

The frequency coefficients are spaced at equal frequency intervals.

25 In accordance with a second aspect of the present invention, a method of making a digital filter is provided and comprises the step of establishing a plurality of frequency response

coefficients separated at frequency intervals. The frequency response coefficients are graphically characterized by a base point, a series of principal points and a series of mirror points and have either zero phase angles or linearly spaced phase angles. The base point has a frequency of zero. A portion of the principal points are situated at frequencies encompassing the range of human hearing and a portion of the mirror points have frequencies and amplitudes which mirror the portion of the principal points when viewed relative to a mid frequency higher than the frequencies of the principal points. The method further comprises the steps of performing inverse discrete Fourier transformations to map the frequency response coefficients into corresponding time response coefficients, and storing the time response coefficients in a digital memory.

Preferably, the portion of the principal points are situated at predetermined frequencies within the range of human hearing and have amplitudes that roughly are inversely corresponding to human hearing sensitivity at the predetermined frequencies.

The frequency response coefficients are established at uniformly spaced frequency intervals.

The establishing and performing steps preferably comprise the following steps:
selecting a plurality of first frequency response coefficients separated at uniformly spaced frequency intervals, wherein the first frequency response coefficients have either zero phase angles or linearly spaced phase angles and each first frequency response coefficient further has an amplitude and a frequency;

arranging the plurality of first frequency response coefficients in order from lowest frequency to highest frequency to define a list of first frequency response coefficients;

performing inverse discrete Fourier transformations to map the plurality of first frequency response coefficients into corresponding first time response coefficients;

discarding a pair of the first time response coefficients which have equal magnitudes and are positioned adjacent to one another in the list, with remaining time response coefficients defining second time response coefficients;

assessing the effect on a frequency response of the digital filter after discarding the pair of the first time response coefficients;

repeating the performing, discarding and assessing steps until a pair of discarded time response coefficients cause a significant change in the frequency response of the digital filter; and

adding to remaining time response coefficients the pair of discarded time response coefficients causing a significant change in the frequency response of the digital filter. The added and remaining time response coefficients comprise final time response coefficients.

The method of making a digital filter preferably further comprises the steps of: multiplying each of the final time response coefficients by an integer conversion number to define converted final time response coefficients, wherein the conversion number is sufficiently large to permit discarding any remaining fractional portion without losing substantial final time response coefficient accuracy; and discarding from each of the converted final time response coefficients any remaining fractional portion. The conversion number is preferably selected as a power of two.

The assessing step preferably comprises the steps of: generating a first frequency response curve from the first frequency response coefficients; performing discrete Fourier transformations to map the second time response coefficients into corresponding second frequency response coefficients; generating a second frequency response curve from the second frequency response coefficients; and comparing the first and second frequency response curves to determine if the second frequency response curve is substantially different from the first frequency response curve.

Each of the frequency response coefficients has an amplitude and a frequency. The range of human hearing is within a band of frequencies having a low end and a high end. Preferably, a portion of the frequency response coefficients having frequencies between a reference frequency and the high end increase in amplitude as per increasing frequencies from the reference frequency toward the high end. It is also preferred that a portion of the frequency response coefficients

having frequencies between a reference frequency and the low end increase in amplitude as per decreasing frequencies from the reference frequency toward the low end.

In one embodiment of the present invention, the frequency response coefficients having frequencies between the reference frequency and the high end increase in amplitude up to a significant amplitude peak at a peak high frequency and decrease in amplitude as per increasing frequencies toward the high end above the peak high frequency.

In another embodiment of the present invention, the frequency response coefficients having frequencies between the reference frequency and the high end increase in amplitude up to a significant amplitude peak at a peak high frequency, decrease in amplitude as per increasing frequencies down to a significant amplitude trough at a trough high frequency and increase in amplitude as per increasing frequencies toward the high end.

The reference frequency may fall within a range of from about 501 Hz to about 8018 Hz. The peak high frequency may fall within a range of, from about 2004 Hz to about 20045 Hz. The amplification of the frequency response coefficient at the peak high frequency may be from about 1.3 times to about 6.0 times the amplification of the frequency response coefficient at the reference frequency.

In accordance with a third aspect of the present invention, a method is provided for enhancing a series of digital audio samples comprising the steps of: receiving the series of digital audio samples, and generating a driving signal by convolving the series of samples in real time with a series of stored time coefficients. The time coefficients are mapped to a like number of frequency coefficients. The frequency coefficients are spaced at frequency intervals, have either zero phase angles or linearly spaced phase angles, and have amplitudes which are mirrored about a mid frequency.

The method for enhancing a series of digital audio samples may further comprise the step of generating an analog audio signal from the driving signal.

The time coefficients are preferably integer time coefficients.

The step of generating a driving signal comprises the step of:

repeatedly solving the following equation for Y:

$$Y(n) = A_0X(n) + A_1X(n-1) + \dots + A_{N-1}X(n-[N-1])$$

where A_0 through A_{N-1} are the stored time coefficients;

$X(n)$ is the most recent sample received;

$X(n-1)$ through $X(n-[N-1])$ correspond to $N-1$ samples received prior to sample

$X(n)$;

n is the running index of the time coefficients being computed;

N is equal to the number of terms in the equation to the right side of the equal sign; and

wherein calculated values of Y define the driving signal.

The step of generating a driving signal may further comprise the steps of dividing the values of Y by a number previously used to convert initial real number time coefficients to integer time coefficients; and discarding any remaining fractional portion of the divided values of Y .

The receiving step may comprise the step of reading the series of digital samples from a digital recording medium or from a compressed file. The receiving step may also comprise the step of downloading audio sample streams from the Internet.

In accordance with a fourth aspect of the present invention, an apparatus is provided for enhancing a series of digital audio samples. The apparatus comprises a device for receiving the series of digital samples and a digital filter comprising a series of stored time response coefficients. The time response coefficients are mapped to a like number of frequency response coefficients. The frequency response coefficients are spaced at frequency intervals, have phase angles of zero and have amplitudes which are mirrored about a mid frequency. The apparatus further comprises a microprocessor for generating a driving signal by convolving the sound

samples in real time against the time coefficients.

The receiving device comprises a digital signal reader.

The microprocessor convolves the sound samples in real time against the time response coefficients by repeatedly solving the following equation for Y:

5
$$Y(n) = A_0X(n) + A_1X(n-1) + \dots + A_{N-1}X(n-[N-1])$$

where A_0 through A_{N-1} are the stored time coefficients;

$X(n)$ is the most recent sample received;

$X(n-1)$ through $X(n-[N-1])$ correspond to N-1 samples received prior to sample
10 $X(n)$;

n is the running index of the time coefficients being computed;

N is equal to the number of terms in the equation to the right side of the equal
sign; and

wherein calculated values of Y define the driving signal.

15 The microprocessor may further divide the values of Y by a number previously used to convert real number time coefficients to integer time coefficients and discards any remaining fractional portion of the divided values of Y.

The apparatus may further comprise a converting device responsive to the driving signal for generating an analog audio signal from the driving signal.

20 In accordance with a fifth aspect of the present invention, a filter package is provided having two or more parallel digital filters. A first filter is provided which comprises a series of digitized first time coefficients stored in a first memory. The time coefficients are mapped to a like number of first frequency coefficients. The first frequency coefficients have either zero
25 phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency. A second digital filter is provided and comprises a series of digitized second time

coefficients at least one of which has a value which is different from each of the first time coefficients. The second time coefficients are stored in a second memory and mapped to a like number of second frequency coefficients. The second frequency coefficients have either zero phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency.

Preferably, the number of the first time coefficients is equal to or greater than 5 and the number of the second time coefficients is equal to or greater than 5. The first memory and the second memory may comprise the same memory component.

In accordance with a sixth embodiment of the present invention, an apparatus is provided for enhancing a series of digital audio samples. The apparatus comprises a device for receiving the series of digital samples and a filter package. The filter package has a first digital filter comprising a series of digitized first time response coefficients stored in a first memory. The time coefficients are mapped to a like number of first frequency coefficients. The first frequency coefficients have either zero phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency. The filter package also includes a second digital filter comprising a series of digitized second time response coefficients at least one of which has a value which is different from each of the first time coefficients. The second time coefficients are stored in a second memory and mapped to a like number of second frequency coefficients. The second frequency coefficients have either zero phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency. The apparatus further includes a microprocessor for generating a driving signal by convolving the sound samples in real time against either the first time response coefficients or the second time response coefficients.

The apparatus may further comprise an input device coupled to the microprocessor for selecting one of the first filter and the second filter. The microprocessor generates the driving signal by convolving the sound samples in real time against the first time response coefficients when the first filter is selected and the second time response coefficients when the second filter is

selected. The apparatus may also comprise a converting device responsive to the driving signal for generating an analog audio signal from the driving signal.

Brief Description of the Drawings

Fig. 1 is a block diagram of one embodiment of an audio playback system according to the invention.

Fig. 2 is a schematic illustration of a frequency response curve for a digital filter in a first embodiment.

Fig 3 is a schematic illustration of a frequency response curve for a digital filter in a second embodiment.

Fig. 4 is a schematic illustration of a frequency response curve for a digital filter in a third embodiment.

Fig. 5 is a schematic illustration of a frequency response curve for a digital filter in a fourth embodiment.

Fig. 6 is a schematic illustration of a frequency response curve for a digital filter in a fifth embodiment.

Fig. 7 is a schematic illustration of a frequency response curve for a digital filter in a sixth embodiment.

Detailed Description

Fig. 1 illustrates a personal computer 10, organized in accordance with the present invention. In the illustrated arrangement, personal computer 10 has a microprocessor 20, a CD reader 30 and a sound card 40. There also is a digital filter 50 which preferably comprises an array of storage locations 52 within a random access memory. Further portions of the memory (not illustrated) may be devoted to other uses. A series of N time response values, A_0 through A_{N-1} , are tabulated in a written program for downloading into storage locations 52. These

response values, hereinafter referred to as time coefficients, are established by a technique described below.

A system clock (not illustrated) causes CD reader 30 to read a series of digitized sound samples, at a predetermined sampling frequency such as 44,100 Hz. Many other sampling rates exist. For example, sampling rates of 22,050 Hz and 11,025 Hz are used in many PC applications. Some audio CD's are now produced using other sampling rates. Digital video disks are produced at sampling rates of 64,000 Hz. The telephone industry samples at a rate of 8000 Hz. The apparatus and methods set out herein are applicable to any sampling rate.

Each sample is designated $X(n)$ at the time of sampling and is stored temporarily in a designated storage location 22. The sound samples are later shifted successively through a series of $N-1$ other storage locations 22 for generation of time shifted samples $X(n-1)$ through $X(n-[N-1])$. Storage locations 22, may be thought of as being equivalent to stages of a shift register within microprocessor 20 and are so illustrated in Fig. 1. However, microprocessor 20 may not have sufficient memory for this purpose, and therefore the computer program may cause the sound samples to be shifted through a designated portion of the random access memory.

Microprocessor 20 multiplies each A_n by a corresponding $X(n)$, as indicated by the multiplication blocks 24. The $A_n X(n)$ products then are summed as indicated by a set of summation blocks 26. It will be appreciated that microprocessor 20 performs N shift operations, N multiplications and N summations for each sound sample read by CD reader 30. The calculated sums are supplied to sound card 40 at 44,100 Hz and define a driving signal. Operations within CD reader 30 and sound card 40 are effected by conventional calls to the operating system. Shifting of samples, multiplication by time response coefficients and summation is a matter of routine programming and need not be further described.

The control program for personal computer 10 convolves N time response coefficients $A_0 - A_{N-1}$ against the entire series of sound samples. Mathematically speaking, the computer repeatedly solves the following equation:

$$Y(n) = A_0X(n) + A_1X(n-1) + \dots + A_{N-1}X(n-[N-1])$$

where A_0 through A_{N-1} are the stored time coefficients;

$X(n)$ is the most recent sample received;

$X(n-1)$ through $X(n-[N-1])$ correspond to $N-1$ samples received prior to sample

5 $X(n)$;

n is the running index of the time coefficients being computed;

N is equal to the number of terms in the equation to the right side of the equal sign; and

wherein calculated values of Y define the driving signal.

10

When sampling at 44,100 Hz, all calculations implied by the above equation must be completed within a sampling interval, Δ , of 22.68 microseconds. Actually much less time is available, because the operating system requires time for performing its normal housekeeping functions and running any other applications which simultaneously may be open. Consequently it is necessary to find a series of discrete values for the time response function which are few in number, yet able to produce the high quality sound reproduction desired. In accordance with a preferred embodiment of this invention it has been found that digital music of the desired quality may be generated for an odd value of N (the number of time response coefficients) as low as 7. A noticeable degree of enhancement of digital music has even been accomplished with a value of N as low as 5. Accordingly, it has been found that the value of N is at least 5, preferably 7, more preferably 9, and most preferably 11. It is also contemplated that the value of N may comprise an odd integer greater than 11. It is further contemplated that the value of N may comprise an even integer greater than or equal to 6, such as 8, 10 or 12. However, it is preferred that N comprise an odd integer.

15

20

25

As described above, the convolution process is carried out in real time using appropriate time response coefficients. These time response coefficients are calculated off-line and are mapped to a like number of frequency coefficients established as discussed below. That procedure generates N frequency coefficients H_0 - H_{N-1} , each having a frequency and an amplitude,

which are mapped into N time response coefficients A_0 - A_{N-1} by use of the discrete inverse Fourier transformation:

$$A_n = \frac{1}{N} \sum_{k=0}^{N-1} H_k e^{+i2\pi kn/N}$$

By way of example, N may have a value of 19, which would call for 19 time response coefficients, all derived from a set of 19 frequency coefficients, regularly spaced at intervals F_s in accordance with the time-frequency uncertainty principle, a relationship stated in the following equation:

$$F_s = \frac{1}{\Delta N}$$

Thus for $\Delta = 1 / 44,100$ and $N = 19$, $F_s = 2321$ Hz. The results are set forth in TABLE I below.

TABLE 1

<u>Freq. ~ Hz</u>	<u>Amp of Freq Coeff</u>	<u>Amp of Time Coeff</u>	<u>Phase Angle of Time Coeff</u>
0	2.5	3.0295	0
2321	2.5	0.4046	Π
4642	2.15	0.01	Π
6963	2.4	0.1905	0
9284	2.6	0.0237	Π
11605	2.9	0.0694	Π
13926	3.78	0.2137	0
16247	4.6	0.2074	Π
18568	2.6	0.1175	0
20889	4	0.0714	Π

	23210	4	0.0714	Π
	25531	2.6	0.1175	0
	27852	4.6	0.2074	Π
	30173	3.78	0.2137	0
5	32494	2.9	0.0694	Π
	34815	2.6	0.0237	Π
	37136	2.4	0.1905	0
	39457	2.15	0.01	Π
	41778	2.5	0.4046	Π

In general the A_n and the H_k are all complex numbers, having a magnitude and a phase. However, in the practice of a first embodiment of this invention the H_k have a phase angle of 0, and the A_n have a phase angle of either 0 or Π . Values of Π (i.e., 3.14159) are accommodated in the filter design by assigning a negative value to the amplitude of the time coefficient. The 19 frequency domain points define a frequency response curve 58 extending from 0 Hz to 41,778 Hz as illustrated in Fig. 2. They include a base point 60, principal points 61 - 69 and mirror points 71 - 79. Frequency domain points 60 - 79 are set at regular intervals of 2321 Hz with mirror points 71 - 79 having amplitudes equal to principal points 61 - 69 respectively. It will be observed that the principal points and the mirror points are mirrored about a mid frequency of 22,050 Hz, half the 44,100 Hz sampling frequency. This produces a periodic response at the sampling frequency. That periodicity effectively extends the frequency response curve 58 to 44,100 Hz and sets a virtual point (not illustrated) at 44,100 Hz having a magnitude equal to that of base point 60. This virtual frequency domain point is mapped to a virtual time response point (also not illustrated) equal to, and synchronous with, A_0 . Since 19 is an odd number there is no frequency domain point at the mirroring mid frequency.

Since the human ear does not respond to frequencies in excess of about 20,000 Hz, the entire information content of the original audio signal can be recorded by low pass filtering at 22,050 Hz, followed by sampling and recording at 44,100 Hz. CDs and other digital recordings

are usually prepared in this fashion. That gives two points per cycle of the highest frequency present.

Frequency response points were selected in the range from 20 Hz to 20,000 Hz having amplitudes bearing a roughly inverse relationship to the sensitivity of the human ear over that same range. This flattens out the perceived response of the filter to the regenerated sound. In particular the frequency response was relatively decreased at points 68 and 62 to compensate for regions of increased ear sensitivity near 4642 Hz and 18,568 Hz respectively, and it was relatively increased at point 63 to compensate for reduced ear sensitivity in the region around 16,247 Hz. Thus, as is apparent from Fig. 2, frequency response coefficients 62-69 having frequencies between a reference frequency of 4642 Hz and a high end frequency of 20,000 Hz increase in amplitude as per increasing frequencies from the reference frequency up to a significant amplitude peak at a peak high frequency of 16,247 Hz and decrease in amplitude as per increasing frequencies down to a significant amplitude trough at a trough high frequency of 18,568 Hz. The amplification of the frequency response coefficient at the peak high frequency is about 2.1 times the amplification of the frequency response coefficient at the reference frequency. The frequency response coefficient 69 which is positioned between the reference frequency and a low end frequency of 20 Hz has an amplitude which is slightly greater than that of the frequency response coefficient 68 located at the reference frequency.

The required filter response is undefined outside the range of human hearing. That includes the region below about 20 Hz, a free band region between 20,000 Hz and 24,100 Hz, and an end region between 24,100 Hz and 44,100 Hz. However the periodic nature of the filtering process requires some definition for all frequencies between zero and the sampling frequency. Therefore, frequency response points were selected at amplitudes which would tend to lend smoothness to the response function in the undefined regions. Hence, point 60 having a frequency of 0 Hz was selected so as to have an amplitude of 2.5, which is equal to the amplitude for point 69, which has a frequency of 2321 Hz. The amplitudes of points 61 and 71, which fall within the free band region, were selected so as to achieve a generally constant oscillation

frequency across a center band extending from about 11,605 Hz to about 32,494 Hz, i.e., the portions of the curve defined between points 65,62; 62,72; and 72,75 have approximately the same width. Points 72-79 are mirror images of points 62-69. By selecting the amplitudes of points 60, 61 and 71-79 in the manner discussed above, the number of time coefficients having significant or large magnitudes were reduced. In order to reduce processing time during filtering, the number of time coefficients incorporated into the filter must be minimized. By minimizing the number of time coefficients having significant magnitudes, remaining time coefficients having insignificant magnitudes may be discarded resulting in fewer time coefficients required to achieve a desired frequency response for the filter.

The above described digital filter design procedure was found to produce time response coefficients which, when convolved with typical stored music, rendered output sound of remarkably high quality. It was found that background sound which is ordinarily suppressed during storage, was substantially restored upon playback. Moreover, 19 coefficients did not overwhelm the computer. Having achieved those results, filters having lower values of N were then designed.

A digital filter in accordance with a second embodiment of the present invention was created as follows. A set of first frequency response coefficients separated at uniformly spaced frequency intervals were selected. The first frequency response coefficients had zero phase angles. In the illustrated embodiment, the frequency response coefficients set out in Table 1 above were used as the first frequency response coefficients. By the use of discrete inverse Fourier transformation, the plurality of first frequency response coefficients were mapped into corresponding first time response coefficients, which are also set out in Table 1.

As noted above, in order to reduce processing time during filtering, the number of time coefficients should be minimized. So as to achieve that end, a pair of the first time response coefficients having equal magnitudes and being positioned adjacent to one another in Table 1 were removed. The discarded pair of time coefficients each had a magnitude of .0714. The remaining time coefficients defined second time coefficients.

If an even number of first time response coefficients are provided, the one first time response coefficient not having a zero frequency and not having a mate of equal magnitude is also discarded.

The effect of removing the pair of time coefficients on the frequency response of the digital filter was then assessed. This involved generating a first frequency response curve from the first frequency response coefficients. The second time response coefficients were mapped into corresponding second frequency response coefficients by use of the discrete Fourier transformation:

$$H_k = \sum_{n=0}^{N-1} A_n e^{-i \frac{2\pi kn}{N}}$$

A second frequency response curve was then generated using the second frequency response coefficients. The first and second frequency response curves were compared to determine if the second frequency response curve was substantially different from the first frequency response curve. If not, then another pair of time response coefficients, i.e., a pair of the second time response coefficients, having equal magnitudes and being positioned adjacent to one another were removed. This process of removing and assessing continued until a pair of discarded time response coefficients caused a significant change in the perceived enhancement caused by the frequency response of the digital filter. A significant change in the perceived enhancement caused by the frequency response of the digital filter corresponds to a substantial difference between an initial and a subsequent frequency response curve. When a significant change occurred, this last pair of discarded time response coefficients were added back to the time response coefficients. These remaining time response coefficients defined final time response coefficients.

In order to reduce processing time, it is preferred that the time response coefficients comprise integer numbers. In order to convert the final time response coefficients into integers,

they were multiplied by an integer conversion number sufficiently large to permit any remaining fractional portion to be discarded without losing substantial final time response coefficient accuracy. A substantial loss in final time response coefficient accuracy occurs when the resulting frequency response of the digital filter produces an enhancement perceptibly different from the desired enhancement. It is also preferred that the integer conversion number be selected as a power of two so that shifting may be used in place of division when subsequent renormalization occurs for calculated values of Y. In the illustrated embodiment, the final time coefficients (set out in brackets in Table 2 below) were multiplied by 2^{13} (8192). Any remaining fractional portions of the converted time coefficients were discarded. The integer final time coefficients are set out in Table 2 below. They may be tabulated in a written program for downloading into storage locations 52. This filter has 11 time response coefficients.

Prior to the microprocessor 20 supplying the calculated values of Y to the sound card 40, the microprocessor 20 must renormalize those values. This involves dividing each value of Y by the integer conversion number. Alternatively, if the integer conversion number is selected as a power of two, the microprocessor 20 can effect renormalization by right shifting an appropriate number of bit positions, 13 in the illustrated embodiment.

A frequency response curve 80 plotted from the final frequency response coefficients, set out in Table 2, is shown in Fig. 3. Curve 80 has a base point 100. It also has principal points 101 - 105, which are mirrored by points 111- 115. As is apparent from Fig. 3, frequency response coefficients 102-105 having frequencies between a reference frequency of 4009 Hz and a high end frequency of 20,000 Hz increase in amplitude as per increasing frequencies from the reference frequency toward the high end.

TABLE 2

<u>Freq. ~ Hz</u>	<u>Amp of Freq Coeff</u>	<u>Amp of Time Coeff</u>	<u>Phase of Time Coeff</u>
00000	2.50	23,980 (2.9273)	0
04009	2.00	3,593 (.4386)	Π

TRD 021 PA

08018	2.40	125	(0.0153)	0
12027	2.85	1226	(0.1497)	0
16036	4.00	598	(0.0731)	II
20045	3.50	1089	(0.1330)	0
24054	3.50	1089	(0.1330)	0
28063	4.00	598	(0.0731)	II
32072	2.85	1226	(0.1497)	0
36081	2.40	125	(0.0153)	0
40090	2.00	3,593	(0.4386)	II

A filter in accordance with a third embodiment of the present invention was created using the same design procedures undertaken to construct the filter of the second embodiment. The third filter's final frequency and time response coefficients are set out in Table 3 below. The final time response coefficients both before and after being multiplied by an integer conversion number equal to 8192 are set out in Table 3. A frequency response curve 90 plotted using the final frequency response coefficients is shown in Fig. 4. The curve has a base point 120, principal points 121-125 and mirror points 131-135. As is apparent from Fig. 4, frequency response coefficients 122-125 having frequencies between a reference frequency of 4009 Hz and a high end frequency of 20,000 Hz increase in amplitude as per increasing frequencies from the reference frequency toward the high end.

TABLE 3

<u>Freq. ~ Hz</u>	<u>Amp of Freq Coeff</u>	<u>Amp of Time Coeff</u>	<u>Phase of Time Coeff</u>
00000	2.50	24,948 (3.0455)	0
04009	1.00	5958 (0.7274)	Π
08018	2.50	1634 (0.1995)	Π
12027	3.50	3094 (0.3777)	0
16036	5.00	237 (0.0290)	Π
20045	3.50	2503 (0.3056)	0
24054	3.50	2503 (0.3056)	0
28063	5.00	237 (0.0290)	Π
32072	3.50	3094 (0.3777)	0
36081	2.50	1634 (0.1995)	Π
40090	1.00	5958 (0.7274)	Π

The above description of the invention teaches a straight forward calculation of the sound card driving signal, Y. A more preferred procedure takes advantage of an observed symmetry in the time coefficients. That is, $A_m = A_n$ where $0 < n \leq (N + 1) / 2$ and $m = N - n$. In the case where $N = 11$ a simplified calculation of the sound card driving signal takes the form:

$$Y = A_0 X_0 + A_1(X_1 + X_{10}) + A_2(X_2 + X_9) + A_3(X_3 + X_8) + A_4(X_4 + X_7) + A_5(X_5 + X_6)$$

This reduces the number of time consuming multiplications. The procedure may be extended to other values of N.

Final frequency and time response coefficients for filters of fourth, fifth and sixth embodiments of the present invention are set out in Tables 4-6 below. The final time response coefficients both before and after being multiplied by an integer conversion number equal to 8192 are set out in Tables 4-6. Nine frequency and time response coefficients are provided for the filter set out in Table 4; seven frequency and time response coefficients are provided for the

filter set out in Table 5; and five frequency and time response coefficients are provided for the filter set out in Table 6. A frequency response curve 140 for the fourth filter is shown in Fig. 5, a frequency response curve 150 for the fifth filter is shown in Fig. 6, and a frequency response curve 160 for the sixth filter is shown in Fig. 7. The fourth and fifth filters provided an enhancement which is comparable to that provided by the first, second and third filters set out in Tables 1-3. While the enhancement of the sixth filter was not equal to that of the fourth and fifth filters, a noticeable enhancement did occur.

TABLE 4

<u>Freq. ~ Hz</u>	<u>Amp of Freq Coeff</u>	<u>Amp of Time Coeff</u>	<u>Phase of Time Coeff</u>
0	2	24,576 (3.0000)	0
4900	1	7175 (0.8759)	II
9800	3	361 (0.0441)	II
14700	4	1365 (0.1667)	0
19600	4.5	2075 (0.2533)	0
24500	4.5	2075 (0.2533)	0
29400	4	1365 (0.1667)	0
34300	3	361 (0.0441)	II
39200	1	7175 (0.8759)	II

TABLE 5

<u>Freq. ~ Hz</u>	<u>Amp of Freq Coeff</u>	<u>Amp of Time Coeff</u>	<u>Phase of Time Coeff</u>
0	2	21,064 (2.5714)	0
6300	1	6198 (0.7566)	II
12600	3	1330 (0.1624)	0
18900	4	2526 (0.3084)	0
25200	4	2526 (0.3084)	0

31500	3	1330 (0.1624)	0
37800	1	6198 (0.7566)	II

TABLE 6

<u>Freq. ~ Hz</u>	<u>Amp of Freq Coeff</u>	<u>Amp of Time Coeff</u>	<u>Phase of Time Coeff</u>
0	2	16,384 (2.000)	0
8820	1	3663 (0.4472)	II
17640	3	3663 (0.4472)	0
26460	3	3663 (0.4472)	0
35280	1	3663 (0.4472)	II

Filters constructed in accordance with the present invention may have a reference frequency which falls within the range of from about 501 Hz to about 8018 Hz; a peak high frequency which falls within the range of from about 1002 Hz to about 20045 Hz; a trough high frequency which can fall at any frequency after the peak high frequency; and a peak low frequency which falls within the range of from about 0 Hz to about 2004 Hz. It is further contemplated that the amplification of the frequency response coefficient at the peak high frequency may be about 1.3 times to about 6.0 times the amplification of the frequency response coefficient at the reference frequency. It is also contemplated that the amplification of the frequency response coefficient at the peak low frequency may be about 1.1 times to about 3.0 times the amplification of the frequency response coefficient at the reference frequency.

It is also contemplated that filters of the present invention, including the filters set out herein may be used with a microprocessor or like device coupled to a digital signal reader (e.g., a real audio editor, CD or DVD player, etc.) which reads digital signals. The source of such digital signals can be digital samples stored on a digital recording medium as well as digital signals from, for example, audio streams (i.e., compressed packets of digital information) received over the Internet; MP3, liquid audio, a2b, and other compressed files received over the Internet and

stored on any conventional memory device; etc. When uncompressed data is read, the audio signals may be processed directly. When compressed data is read, the data must be uncompressed prior to processing. Instead of sending the driving signal directly to a sound card, it is contemplated that a microprocessor, after generating the driving signal or Y-values, may store the driving signal in any conventional memory device capable of storing digital data, transfer the driving signal over the Internet, the airways (via for example radio or television signals, microwaves, etc.), a network, cable TV lines, the telephone lines, etc. to another digital signal reader, or digital signal storing device.

Frequency response coefficients for a filter of a seventh embodiment of the present invention are set out in Table 6A below. The frequency response coefficients have linearly spaced phase angles. This is in contrast to the zero phase angles of the time response coefficients set out in Tables 1-6 above. The frequency response coefficient may be mapped into corresponding time response coefficients by use of the discrete inverse Fourier transformation set out above.

TABLE 6A

<u>Freq. ~ Hz</u>	<u>Amp of Freq. Coeff</u>	<u>Phase Angle of Freq. Coeff</u>
0	2.5	0
4009	1	-0.57
8018	2.5	-1.14
12027	3.5	-1.71
16036	5	-2.28
20045	3.5	-2.85
24054	3.5	-3.42
28063	5	-3.99
32072	3.5	-4.56
36081	2.5	-5.13

40090	1	-5.7
44099	2.5	-6.27

It is additionally contemplated that two or more of the filters described herein may be stored in a memory component as a filter package such that a user can select any one of the filters making up the package for use in enhancing digital audio samples. For example, a filter package may comprise a first filter having a series of digitized first time coefficients stored in the memory component. The first time coefficients are mapped to a like number of first frequency coefficients. The first frequency coefficients have either zero phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency. The filter package further includes a second digital filter comprising a series of digitized second time coefficients at least one of which has a value which is different from each of the first time coefficients. The second time coefficients are stored in a second memory and mapped to a like number of second frequency coefficients. The second frequency coefficients have either zero phase angles or linearly spaced phase angles and have amplitudes which are mirrored about a mid frequency.

An input device (not shown) such as a keyboard is coupled to a microprocessor for allowing the user to select one of the first and second filters for use at any given time for enhancement of digital audio samples. The microprocessor generates a driving signal by convolving the sound samples in real time against the first time response coefficients when the first filter is selected and the second time response coefficients when the second filter is selected. The apparatus may also comprise a converting device responsive to the driving signal for generating an analog audio signal from the driving signal.

It is contemplated that the filter package may be provided to a prospective customer who intends to purchase a hardware version of a digital filter. Each filter of the software filter package is then tested by the customer. Once a desired filter is selected, the filter manufacturer designs a hardware version of the selected filter and provides it to the customer for testing. Accordingly, the digital filter package allows a filter manufacturer to provide two or more filters

to a prospective customer for testing without having to design and build two or more separate hardware filters.

It is contemplated that the time coefficients set out in Table 1 may be multiplied by an integer conversion number.

5 The digital filters disclosed above are finite impulse response (FIR) filters. The procedure for designing an infinite impulse response (IIR) filter implementation can be very similar to the above described FIR procedure. Assuming that a desired frequency response has been specified at various frequencies, an IIR filter can be developed using the same technique described above for the FIR filter implementation.

10 Using a conventional IIR filter coefficient computation technique, such as that found in Matlab (a software system for filter design and digital signal processing), choose an IIR filter order and input the desired filter order and frequency response. The Matlab function will return the IIR filter coefficients that meet the frequency response and filter order requirements, within some tolerance that is a function of the chosen filter order. Note that the IIR filter has the form (first-order example), as follows:

$$y(k) = b_0 * x(k) + a_1 * y(k-1)$$

15 so that there are feedback terms involving the output. The FIR includes terms from the input, i.e., $x(k)$.

20 The filter coefficients are prepared for real-time implementation as in the FIR case. Each coefficient is multiplied by a large number and the decimal portion of the result is eliminated. In this way the coefficients are made integers, which can make the real-time implementation faster for most computer systems. Because improper scaling could lead to instability, care should be taken when performing this operation with an IIR filter due to the feedback term.

25 The IIR filter has the advantage of potentially requiring fewer coefficients and therefore a more efficient real-time implementation. This means that an IIR filter may take less time to compute an output sample than an equivalent FIR filter. A possible disadvantage of the IIR filter is that it typically does not possess linear phase. If the filter design requires a linear phase, as is preferred for

the frequency response described above, then an FIR filter is normally the only choice. The IIR filter may have approximately linear phase and may only approximate the magnitude response, depending on the order of the IIR filter specified in the design. It is possible to obtain linear phase from an IIR filter by running the data through the IIR filter twice (both forward and backward). However, this
 5 doubles the order of the filter.

The follow equation is a 3rd order IIR filter approximation of the frequency response disclosed above.

$$y(k) = 0.0355x(k) - 0.0709x(k-1) + 0.1509x(k-2) + 0.0533x(k-3) \\ - 0.2944y(k-1) - 0.0399y(k-2) + 0.1033y(k-3)$$

10 Upon comparison, there will likely be some difference between the original FIR frequency response and the 3rd order IIR filter frequency response. Although they are similar in amplitude and shape, they may create slightly noticeable differences in music quality. In addition, the phase response for the 3rd order IIR filter is nonlinear, especially at the higher frequencies, although it appears to be very linear up to about 15 kHz. Hence, at higher
 15 frequencies the nonlinear phase may also contribute to noticeable differences in reproduction quality.

Final frequency and time response coefficients for other FIR digital filters of the present invention are set out below in Tables 7- 34. The final time response coefficients have not yet been multiplied by an integer conversion factor.

TABLE 7

Freq	Amplitude	Time Coefficient	Phase
0	2	2.7273	0
4009	1	0.6916	3.1416
8018	2	0.1595	3.1416
12027	3.5	0.2665	0
16036	4	0.1129	0
20045	3.5	0.1081	0
24054	3.5	0.1081	0
28063	4	0.1129	0
32072	3.5	0.2665	0
36081	2	0.1595	3.1416
40090	1	0.6916	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 8

Freq	Amplitude	Time Coefficient	Phase
0	1.72	1.8709	0
4009	1	0.4524	3.1416
8018	1.35	0.2061	0
12027	1.65	0.0067	3.1416
16036	2.28	0.0949	0
20045	3.15	0.0826	0
24054	3.15	0.0826	0
28063	2.28	0.0949	0
32072	1.65	0.0067	3.1416
36081	1.35	0.2061	0
40090	1	0.4524	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 9

Freq	Amplitude	Time Coeff	Phase
0	2.5	3.1091	0
4009	2	0.5577	3.1416
8018	2.5	0.0106	3.1416
12027	2.85	0.3027	0
16036	5	0.2475	3.1416
20045	3.5	0.2085	0
24054	3.5	0.2085	0
28063	5	0.2475	3.1416
32072	2.85	0.3027	0
36081	2.5	0.0106	3.1416
40090	2	0.5577	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 10

Freq	Amplitude	Time Coefficient	Phase
0	2.5	2.9273	0
4009	1	0.7106	3.1416
8018	2.5	0.0861	3.1416
12027	2.85	0.3286	0
16036	5	0.1285	3.1416
20045	3.5	0.383	0
24054	3.5	0.383	0
28063	5	0.1285	3.1416
32072	2.85	0.3286	0
36081	2.5	0.0861	3.1416
40090	1	0.7106	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 11

Freq	Amplitude
0	2.1
2321	2
4642	1
6963	1
9284	1
11605	1
13926	1
16247	1
18568	1
20889	1
23210	1
25531	1
27852	1
30173	1
32494	1
34815	1
37136	1
39457	1
41778	2

TABLE 12

Freq	Amplitude
0	1.6
21050	1.5
42100	1
63150	1.12
84200	1.2
105250	1.3
126300	1.4
147350	1.6
168400	2
189450	1.9
210500	1.9
231550	2
252600	1.6
273650	1.4
294700	1.3
315750	1.2
336800	1.12
357850	1
378900	1.5

TABLE 13

Freq	Amplitude
0	1.51
1764	1.72
3528	1
5292	1.15
7056	1.21
8820	1.36
10584	1.41
12348	1.65
14112	1.98
15876	2.12
17640	2.49
19404	2.31
21168	2.11
22932	2.11
24696	2.31
26460	2.49
28224	2.12
29988	1.98
31752	1.65
33516	1.41
35280	1.36
37044	1.21
38808	1.15
40572	1
42336	1.72
44100	1.51

TABLE 14

Freq	Amplitude
0	1.61
3392	1
6784	1.19
10176	1.41
13568	1.72
16960	2.49
20352	2.27
23744	2.27
27136	2.49
30528	1.72
33920	1.41
37312	1.19
40704	1

TABLE 15

Freq	Amplitude
0	1.7
2310	1.6
4620	1
6930	1.2
9240	1.3
11550	1.4
13860	1.5
16170	1.6
18480	2.1
20790	2
23100	2
25410	2.1
27720	1.6
30030	1.5
32340	1.4
34650	1.3
36960	1.2
39270	1
41580	1.6

TABLE 16

Freq	Amplitude
0	1.72
4009	1
8018	1.35
12027	1.8
16036	3
20045	3.15
24054	3.15
28063	3
32072	1.8
36081	1.35
40090	1

TABLE 17

Freq	Amplitude
0	1.72
4009	1
8018	1.35
12027	2
16036	3.5
20045	3.15
24054	3.15
28063	3.5
32072	2
36081	1.35
40090	1

TABLE 18

Freq	Amplitude
0	2
4009	1
8018	1.35
12027	2
16036	4
20045	3.15
24054	3.15
28063	4
32072	2
36081	1.35
40090	1

TABLE 19

Freq	Amplitude
0	2
4009	1
8018	1.35
12027	1.65
16036	2.59
20045	3.5
24054	3.5
28063	2.59
32072	1.65
36081	1.35
40090	1

TABLE 20

Freq	Amplitude	Time Coefficient	Phase
0	2.5	2.8684	0
2321	2.5	0.3105	3.1416
4642	2	0.0385	3.1416
6963	2.3	0.1654	0
9284	2.5	0.0134	0
11605	2.9	0.0268	3.1416
13926	3.5	0.1568	0
16247	4	0.1367	3.1416
18568	2.6	0.0653	0
20889	3.5	0.0727	3.1416
23210	3.5	0.0727	3.1416
25531	2.6	0.0653	0
27852	4	0.1367	3.1416
30173	3.5	0.1568	0
32494	2.9	0.0268	3.1416
34815	2.5	0.0134	0
37136	2.3	0.1654	0
39457	2	0.0385	3.1416
41778	2.5	0.3105	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 21

Freq	Amplitude
0	2.5
4009	1
8018	2.5
12027	2.85
16036	4
20045	3.5
24054	3.5
28063	4
32072	2.85
36081	2.5
40090	1

TABLE 22

Freq	Amplitude
0	2.5
4009	1
8018	2.5
12027	2.85
16036	4.5
20045	3.5
24054	3.5
28063	4.5
32072	2.85
36081	2.5
40090	1

TABLE 23

Freq	Amplitude
0	1.9
2321	1.8
4642	1
6963	1.2
9284	1.3
11605	1.4
13926	1.5
16247	1.6
18568	2.1
20889	2
23210	2
25531	2.1
27852	1.6
30173	1.5
32494	1.4
34815	1.3
37136	1.2
39457	1
41778	1.8

TABLE 24

Freq	Amplitude
0	2.5
4009	1.5
8018	2.5
12027	2.85
16036	4
20045	3.5
24054	3.5
28063	4
32072	2.85
36081	2.5
40090	1.5

TABLE 25

Frequency	Amplitude
0	3
4009	2
8018	2.5
12027	2.85
16036	4
20045	3.5
24054	3.5
28063	4
32072	2.85
36081	2.5
40090	2

TABLE 26

Frequency	Amplitude
0	3
4009	1.5
8018	2.5
12027	2.85
16036	4
20045	3.5
24054	3.5
28063	4
32072	2.85
36081	2.5
40090	1.5

TABLE 27

Freq	Amplitude
0	1.9
2321	1.8
4642	1
6963	1.5
9284	1.6
11605	1.7
13926	1.8
16247	1.9
18568	2.2
20889	2
23210	2
25531	2.2
27852	1.9
30173	1.8
32494	1.7
34815	1.6
37136	1.5
39457	1
41778	1.8

TABLE 28

Freq	Amplitude	Time Coefficient	Phase
0	2.5	2.8636	0
4009	1	0.6084	3.1416
8018	2.5	0.1736	3.1416
12027	3.5	0.2247	0
16036	4	0.1454	0
20045	3.5	0.23	0
24054	3.5	0.23	0
28063	4	0.1454	0
32072	3.5	0.2247	0
36081	2.5	0.1736	3.1416
40090	1	0.6084	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 29

Freq	Amplitude
0	2
1131	1.66
2262	1.33
3393	1
4524	1
5655	1.3
6786	1.4
7917	1.5
9048	1.6
10179	1.7
11310	1.8
12441	1.9
13572	2
14703	2.1
15834	2.2
16965	2.4
18096	2.5
19227	2.6
20358	2.7
21489	2.8
22620	2.7
23751	2.6
24882	2.5
26013	2.4
27144	2.3
28275	2.2
29406	2.1
30537	2
31668	1.9
32799	1.8
33930	1.7
35061	1.6
36192	1.5
37323	1.4
38454	1.3
39585	1
40716	1
41847	1.33
42978	1.66

TABLE 30

Frequency	Amplitude
0	2.5
4009	2
8018	2.5
12027	2.85
16036	4.5
20045	3.5
24054	3.5
28063	4.5
32072	2.85
36081	2.5
40090	2

TABLE 31

Frequency	Amplitude
0	2.5
2321	2.5
4642	2.15
6963	2.4
9284	2.6
11605	2.9
13926	3.78
16247	4.6
18568	2.6
20889	4
23210	4
25531	2.6
27852	4.6
30173	3.78
32494	2.9
34815	2.6
37136	2.4
39457	2.15
41778	2.5

TABLE 32

Freq	Amplitude
0	1.6
2321	1.5
4642	1
6963	1.12
9284	1.2
11605	1.3
13926	1.4
16247	1.6
18568	2
20889	1.9
23210	1.9
25531	2
27852	1.6
30173	1.4
32494	1.3
34815	1.2
37136	1.12
39457	1
41778	1.5

TABLE 33

Freq	Amplitude	Time Coefficients	Phase
0	3	1.2759	0
1521	2	0.2615	0
3042	3	0.2209	0
4563	1	0.1608	0
6084	1	0.0913	0
7605	1	0.0239	0
9126	1	0.0308	3.1416
10647	1	0.0644	3.1416
12168	1	0.0729	3.1416
13689	1	0.0567	3.1416
15210	1	0.0208	3.1416
16731	1	0.0264	0
18252	1	0.0745	0
19773	1	0.1134	0
21294	1	0.1351	0
22815	1	0.1351	0
24336	1	0.1134	0
25857	1	0.0745	0
27378	1	0.0264	0
28899	1	0.0208	3.1416
30420	1	0.0567	3.1416
31941	1	0.0729	3.1416
33462	1	0.0644	3.1416
34983	1	0.0308	3.1416
36504	1	0.0239	0
38025	1	0.0913	0
39546	1	0.1608	0
41067	3	0.2209	0
42588	2	0.2615	0

Phase means phase of the time coefficient. All Frequency phases are zero.

TABLE 34

Freq	Amplitude	Time Coefficient	Phase
0	2	1.9487	0
1131	1	0.0506	3.1416
2262	2	0.0486	3.1416
3393	2	0.0454	3.1416
4524	2	0.041	3.1416
5655	2	0.0355	3.1416
6786	2	0.0291	3.1416
7917	2	0.022	3.1416
9048	2	0.0143	3.1416
10179	2	0.0062	3.1416
11310	2	0.0021	0
12441	2	0.0103	0
13572	2	0.0182	0
14703	2	0.0256	0
15834	2	0.0324	0
16965	2	0.0384	0
18096	2	0.0433	0
19227	2	0.0472	0
20358	2	0.0498	0
21489	2	0.0511	0
22620	2	0.0511	0
23751	2	0.0498	0
24882	2	0.0472	0
26013	2	0.0433	0
27144	2	0.0384	0
28275	2	0.0324	0
29406	2	0.0256	0
30537	2	0.0182	0
31668	2	0.0103	0
32799	2	0.0021	0
33930	2	0.0062	3.1416
35061	2	0.0143	3.1416
36192	2	0.022	3.1416
37323	2	0.0291	3.1416
38454	2	0.0355	3.1416
39585	2	0.041	3.1416
40716	2	0.0454	3.1416
41847	2	0.0486	3.1416
42978	1	0.0506	3.1416

Phase means phase of the time coefficient. All Frequency phases are zero.

What is claimed is:

(1) A digital filter comprising a series of digitized time coefficients stored in a memory, said time coefficients being mapped to a like number of frequency coefficients, said frequency coefficients being spaced at frequency intervals, having either zero phase angles or linearly spaced phase angles and having amplitudes which are mirrored about a mid frequency to produce periodicity of a time response for said digital filter.

(2) A digital filter according to claim 1, wherein said time coefficients are odd in number.

(3) A digital filter according to claim 1, wherein the number of said time coefficients is equal to or greater than 5.

(4) A digital filter according to claim 3, wherein the number of said time coefficients is one of 7, 9 and 11.

(5) A digital filter according to claim 1, wherein said time coefficients are defined by inverse discrete Fourier transforms of said frequency coefficients.

(6) A digital filter according to claim 1, wherein a portion of said frequency coefficients having frequencies within a free band are selected so as to achieve a generally constant oscillation frequency across a center band which is broader than said free band.

(7) A digital filter according to claim 1, wherein said frequency coefficients are spaced at equal frequency intervals.

(8) A digital filter according to claim 1, wherein said time coefficients are integer numbers.

5 (9) A method of making a digital filter comprising the steps of:
establishing a plurality of frequency response coefficients separated at frequency intervals, said frequency response coefficients being graphically characterized by a base point, a series of principal points and a series of mirror points and having either zero phase angles or linearly spaced phase angles, said base point having a frequency of zero, a portion of said principal points being situated at frequencies encompassing the range of human hearing and a portion of said mirror points having frequencies and amplitudes which mirror said portion of said principal points when viewed relative to a mid frequency higher than said frequencies of said principal points,
10 performing inverse discrete Fourier transformations to map said frequency response coefficients into corresponding time response coefficients, and
storing said time response coefficients in a digital memory.

(10) A method according to claim 9, wherein said portion of said principal points are situated at predetermined frequencies within the range of human hearing and have amplitudes that roughly are inversely corresponding to human hearing sensitivity at said predetermined frequencies.

(11) A method according to claim 9, wherein said frequency response coefficients are established at uniformly spaced frequency intervals.

(12) A method according to claim 9, wherein said establishing and performing steps comprise the following steps:

selecting a plurality of first frequency response coefficients separated at uniformly spaced frequency intervals, said first frequency response coefficients having either zero phase angles or linearly spaced phase angles and each first frequency response coefficient further having an amplitude and a frequency,

5 arranging said plurality of first frequency response coefficients in order from lowest frequency to highest frequency to define a list of first frequency response coefficients,

performing inverse discrete Fourier transformations to map said plurality of first frequency response coefficients into corresponding first time response coefficients,

10 discarding a pair of said first time response coefficients which have equal magnitudes and are positioned adjacent to one another in said list, remaining time response coefficients defining second time response coefficients,

assessing the effect on a frequency response of the digital filter after discarding said pair of said first time response coefficients,

15 repeating said performing, discarding and assessing steps until a pair of discarded time response coefficients cause a significant change in the frequency response of the digital filter, and

20 adding to remaining time response coefficients said pair of discarded time response coefficients causing a significant change in the frequency response of the digital filter, said added and remaining time response coefficients comprising final time response coefficients.

(13) A method according to claim 12, further comprising the steps of:

25 multiplying each of said final time response coefficients by an integer conversion number to define converted final time response coefficients, said conversion number being sufficiently large to permit discarding any remaining fractional portion without losing substantial final time response coefficient accuracy, and

discarding from each of said converted final time response coefficients any remaining fractional portion.

(14) A method according to claim 13, wherein said conversion number is selected as a power of two.

(15) A method according to claim 12, wherein said assessing step comprises the steps of:
generating a first frequency response curve from said first frequency response coefficients,
performing discrete Fourier transformations to map said second time response coefficients into corresponding second frequency response coefficients,
generating a second frequency response curve from said second frequency response coefficients, and
comparing said first and second frequency response curves to determine if said second frequency response curve is substantially different from said first frequency response curve.

(16) A method according to claim 9, wherein each of said frequency response coefficients having an amplitude and a frequency and said range of human hearing being within a band of frequencies having a low end and a high end, a portion of said frequency response coefficients having frequencies between a reference frequency and said high end increase in amplitude as per increasing frequencies from said reference frequency toward said high end.

(17) A method according to claim 16, wherein said reference frequency is in the range of from about 501 Hz to about 8018 Hz.

(18) A method according to claim 16, wherein said frequency response coefficients having frequencies between said reference frequency and said high end increase in amplitude up to a significant amplitude peak at a peak high frequency and decrease in amplitude as per increasing frequencies toward said high end above said peak high frequency.

(19) A method according to claim 18, wherein said peak high frequency is in the range of from about 1002 Hz to about 20045 Hz.

(20) A method according to claim 18, wherein the amplification of the frequency response coefficient at said peak high frequency is from about 1.3 times to about 6.0 times the amplification of said frequency response coefficient at said reference frequency.

(21) A method according to claim 16, wherein said frequency response coefficients having frequencies between said reference frequency and said high end increase in amplitude up to a significant amplitude peak at a peak high frequency, decrease in amplitude as per increasing frequencies down to a significant amplitude trough at a trough high frequency and increase in amplitude as per increasing frequencies toward said high end.

(22) A method according to claim 9, wherein each of said frequency response coefficients having an amplitude and a frequency and said range of human hearing being within a band of frequencies having a low end and a high end, a portion of said frequency response coefficients having frequencies between a reference frequency and said low end increase in amplitude as per decreasing frequencies from said reference frequency toward said low end.

(23) A method of enhancing a series of digital audio samples comprising the steps of:
receiving said series of digital audio samples, and

generating a driving signal by convolving said series of samples in real time with a series of stored time coefficients, said time coefficients being mapped to a like number of frequency coefficients, said frequency coefficients being spaced at frequency intervals, having either zero phase angles or linearly spaced phase angles and having amplitudes which are mirrored about a mid frequency.

(24) A method as set forth in claim 23, further comprising the step of generating an analog audio signal from said driving signal.

(25) A method according to claim 23, wherein said time coefficients are integer time coefficients.

(26) A method according to claim 23, wherein said step of generating a driving signal comprises the step of:

repeatedly solving the following equation for Y:

$$Y(n) = A_0X(n) + A_1X(n-1) + \dots + A_{N-1}X(n-[N-1])$$

where A_0 through A_{N-1} are said stored time coefficients;

$X(n)$ is the most recent sample received;

$X(n-1)$ through $X(n-[N-1])$ correspond to N-1 samples received prior to sample $X(n)$;

n is the running index of the time coefficients being computed;

N is equal to the number of terms in the equation to the right side of the equal sign;

wherein calculated values of Y define said driving signal.

(27) A method according to claim 26, wherein said step of generating a driving signal further comprises the steps of:

dividing said values of Y by a number previously used to convert initial real number time coefficients to said integer time coefficients; and

5 discarding any remaining fractional portion of said divided values of Y.

(28) A method according to claim 23, wherein said receiving step comprises the step of reading said series of digital samples from a digital recording medium.

(29) A method according to claim 23, wherein said receiving step comprises the step of reading said series of digital samples from a compressed file.

(30) A method according to claim 23, wherein said receiving step comprises the step of downloading audio sample streams from the Internet.

(31) Apparatus for enhancing a series of digital audio samples comprising:

a device for receiving said series of digital samples,

a digital filter comprising a series of stored time response coefficients, said time response coefficients being mapped to a like number of frequency response coefficients, said frequency response coefficients being spaced at frequency intervals, having phase angles of zero and having amplitudes which are mirrored about a mid frequency, and

a microprocessor for generating a driving signal by convolving said sound samples in real time against said time coefficients.

(32) Apparatus as set forth in claim 31, wherein said receiving device comprises a digital signal reader.

(33) Apparatus as set forth in claim 31, wherein said microprocessor convolves said sound samples in real time against said time response coefficients by repeatedly solving the following equation for Y:

$$Y(n) = A_0X(n) + A_1X(n-1) + \dots + A_{N-1}X(n-[N-1])$$

where A_0 through A_{N-1} are said stored time coefficients;

$X(n)$ is the most recent sample received;

$X(n-1)$ through $X(n-[N-1])$ correspond to $N-1$ samples received prior to sample $X(n)$;

n is the running index of the time coefficients being computed;

N is equal to the number of terms in the equation to the right side of the equal sign;

wherein calculated values of Y define said driving signal.

(34) Apparatus as set forth in claim 33, wherein said microprocessor further divides said values of Y by a number previously used to convert real number time coefficients to integer time coefficients, said integer time coefficients defining said stored time coefficients, and said microprocessor further discarding any remaining fractional portion of said divided values of Y.

(35) Apparatus as set forth in claim 31, further comprising a converting device responsive to said driving signal for generating an analog audio signal from said driving signal.

5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

(36) A filter package having two or more parallel digital filters comprising:
a first digital filter comprising a series of digitized first time coefficients stored in a first memory, said time coefficients being mapped to a like number of first frequency coefficients, said first frequency coefficients having either zero phase angles or linearly spaced phase angles and having amplitudes which are mirrored about a mid frequency, and
a second digital filter comprising a series of digitized second time coefficients at least one of which has a value which is different from each of said first time coefficients, said second time coefficients being stored in a second memory and mapped to a like number of second frequency coefficients, said second frequency coefficients having either zero phase angles or linearly spaced phase angles and having amplitudes which are mirrored about a mid frequency.

(37) A filter package as set forth in claim 36, wherein the number of said first time coefficients is equal to or greater than 5 and the number of said second time coefficients is equal to or greater than 5.

(38) A filter package as set forth in claim 36, wherein said first memory and said second memory comprise the same memory component.

(39) Apparatus for enhancing a series of digital audio samples comprising:

a device for receiving said series of digital samples,

a filter package having a first digital filter comprising a series of digitized first time response coefficients stored in a first memory, said time coefficients being mapped to a like number of first frequency coefficients, said first frequency coefficients having either zero phase angles or linearly spaced phase angles and having amplitudes which are mirrored about a mid frequency, and a second digital filter comprising a series of digitized second time response coefficients at least one of which has a value which is different from each of said first time coefficients, said second time coefficients being stored in a second memory and mapped to a like number of second frequency coefficients, said second frequency coefficients having either zero phase angles or linearly spaced phase angles and having amplitudes which are mirrored about a mid frequency, and

a microprocessor for generating a driving signal by convolving said sound samples in real time against either said first time response coefficients or said second time response coefficients.

(40) Apparatus as set forth in claim 39, wherein said first memory and said second memory comprise the same memory component.

(41) Apparatus as set forth in claim 39, further comprising an input device coupled to said microprocessor for selecting one of said first filter and said second filter, said microprocessor generating said driving signal by convolving said sound samples in real time against said first time response coefficients when said first filter is selected and said second time response coefficients when said second filter is selected.

(42) Apparatus as set forth in claim 39, further comprising a converting device responsive to said driving signal for generating an analog audio signal from said driving signal.

Abstract

A digital filter is provided for high quality playback of a recorded audio signal. The filter is designed in the frequency domain by establishing a base point and a series of principal points at uniform frequency intervals. The principal points are mirrored by a series of higher frequency mirror points arranged symmetrically about a mid frequency, at half of the sampling frequency of the recorded audio signal. Those principal points within the range of human hearing are given amplitudes that roughly are inversely corresponding to hearing sensitivity at associated frequencies. After the design procedure has been completed, the frequency domain points are mapped into time response coefficients by inverse discrete Fourier transformation. The time response coefficients then are stored for real time convolution with recorded audio samples.

FIG. 1

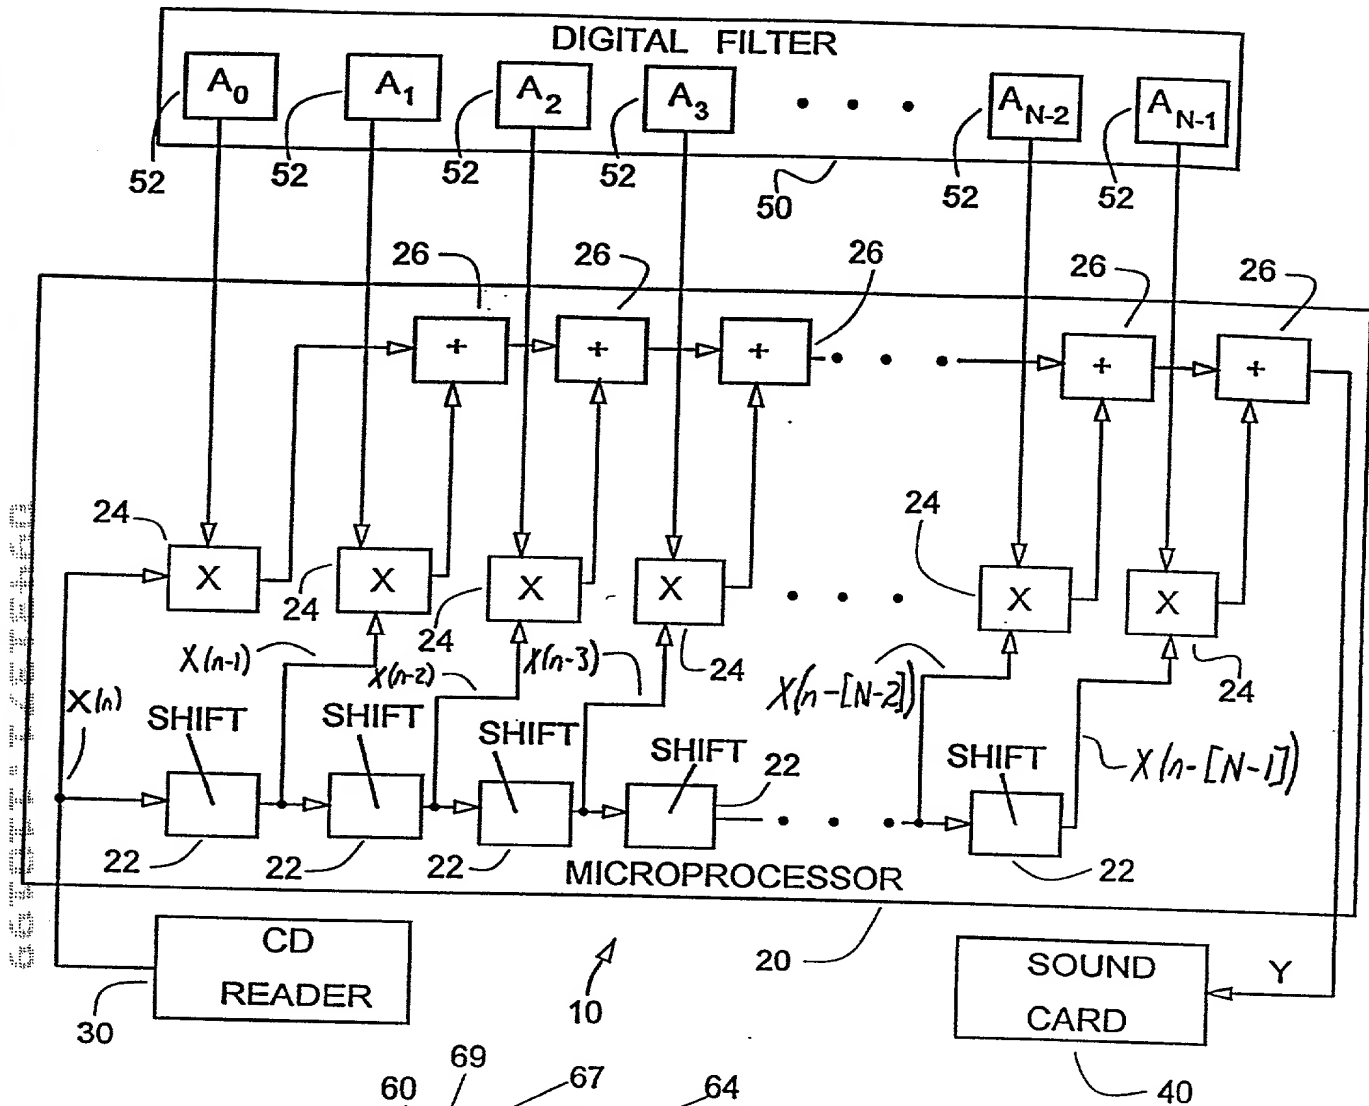


FIG. 2

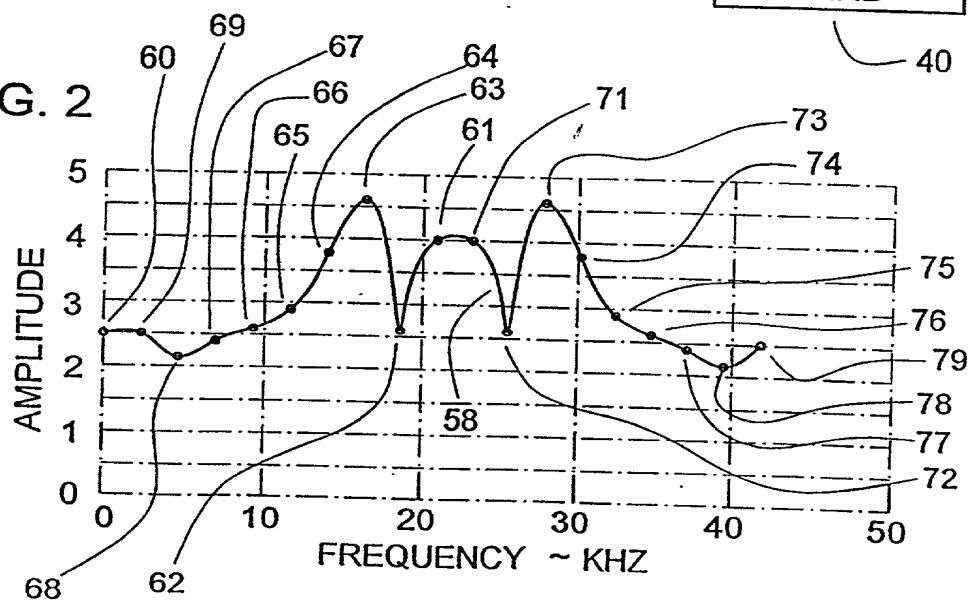


FIG. 3





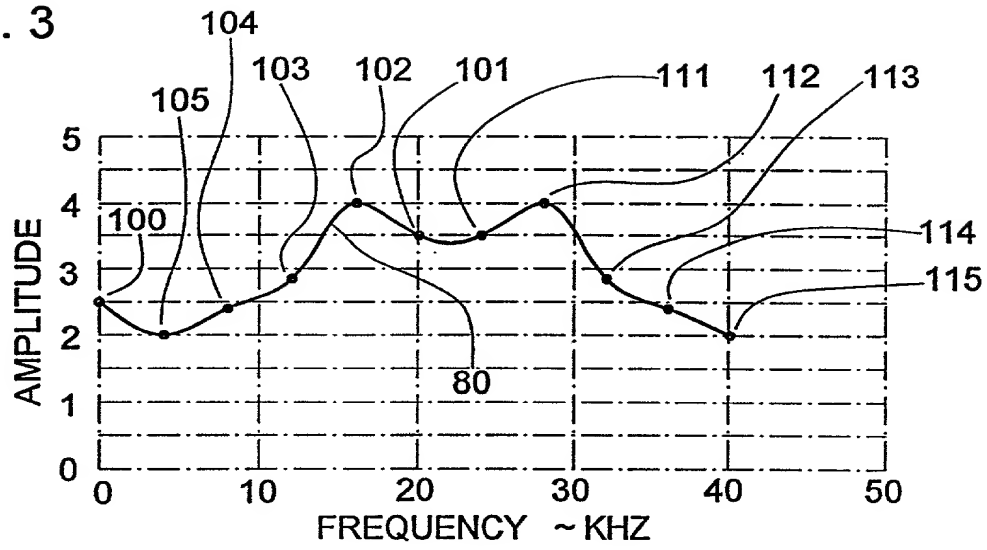


FIG. 4

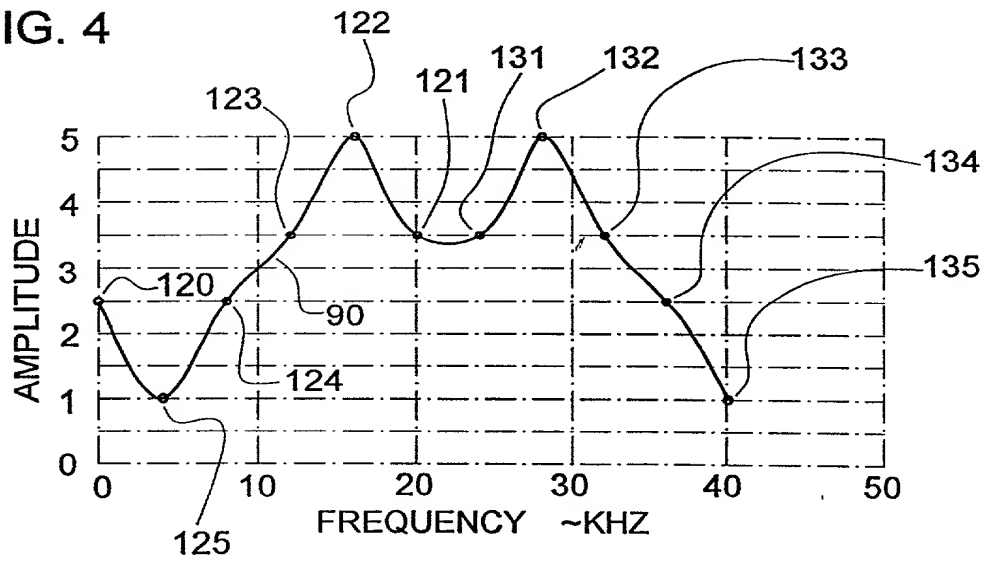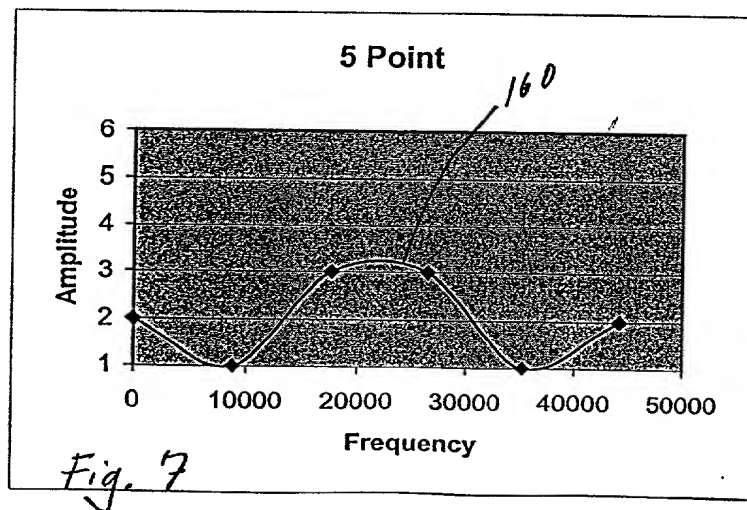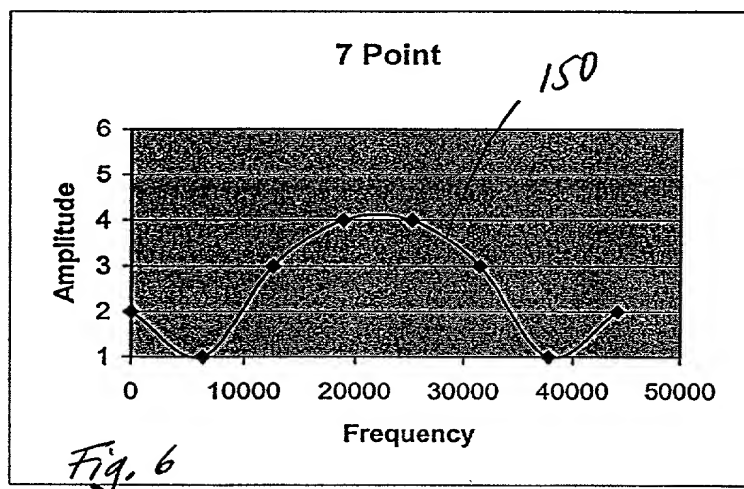

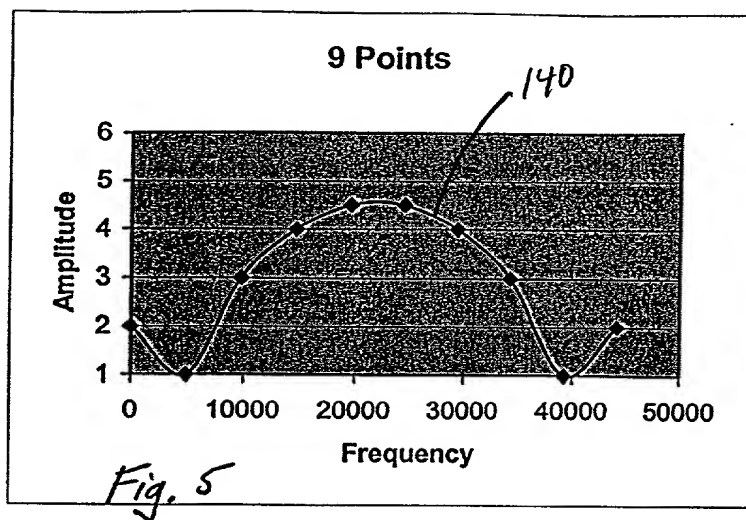

DECLARATION AND POWER OF ATTORNEY

As below named inventors, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names; that

We verily believe we are the original joint inventors of the invention entitled:

DIGITAL FILTER (Docket No. TRD 021 PA), described and claimed

 X in the attached specification;
 in the specification filed _____, as U.S. Application Serial No. _____, and as amended _____.

We hereby authorize the attorney(s) and/or agent(s) appointed herein to indicate above whether the invention is described and claimed in an attached specification and to provide the Filing Date and Serial No. of the corresponding U.S. Application, if previously filed.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims as filed and as amended by any amendment referred to above.

We acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a).

We hereby claim the benefit under 35 USC § 119(e) of any United States provisional application listed below:

Application Number

Filing Date

60/148,787

August 13, 1999

We hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Richard A. Killworth	Reg. No. 26,397
James F. Gottman	Reg. No. 27,262
Timothy W. Hagan	Reg. No. 29,001
Richard C. Stevens	Reg. No. 28,046
Robert L. Showalter	Reg. No. 33,579
James E. Beyer	Reg. No. 39,564
Susan M. Luna	Reg. No. 38,769
Carolyn M. Sloane	Reg. No. 44,339
Daniel C. Stelter	Reg. No. 40,830
Patricia L. Prior	Reg. No. 33,758
William A. Jividen	Reg. No. 42,695

Address all telephone calls to (937) 223-2050. Address all correspondence to: KILLWORTH, GOTTMAN, HAGAN & SCHAEFF, L.L.P., One Dayton Centre, One South Main Street, Suite 500, Dayton, Ohio 45402-2023.

We further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole or first Inventor: Frank A. Scarpino

Inventor's signature _____

Date: _____

Residence: 1984 Indian Head Rd.
Dayton, Ohio 45459

Citizenship: U.S.A.

Post Office Address: c/o True Dimensional Sound, Inc.
1450 Madruga Ave., Suite 404
Coral Gables, Florida 33146

Full name of second Inventor: Arturo H. Garcia

Inventor's signature _____

Date: _____

Residence: 4443 S.W. 11th St.
Miami, Florida 33134

Citizenship: U.S.A.

Post Office Address: c/o True Dimensional Sound, Inc.
1450 Madruga Ave., Suite 404
Coral Gables, Florida 33146